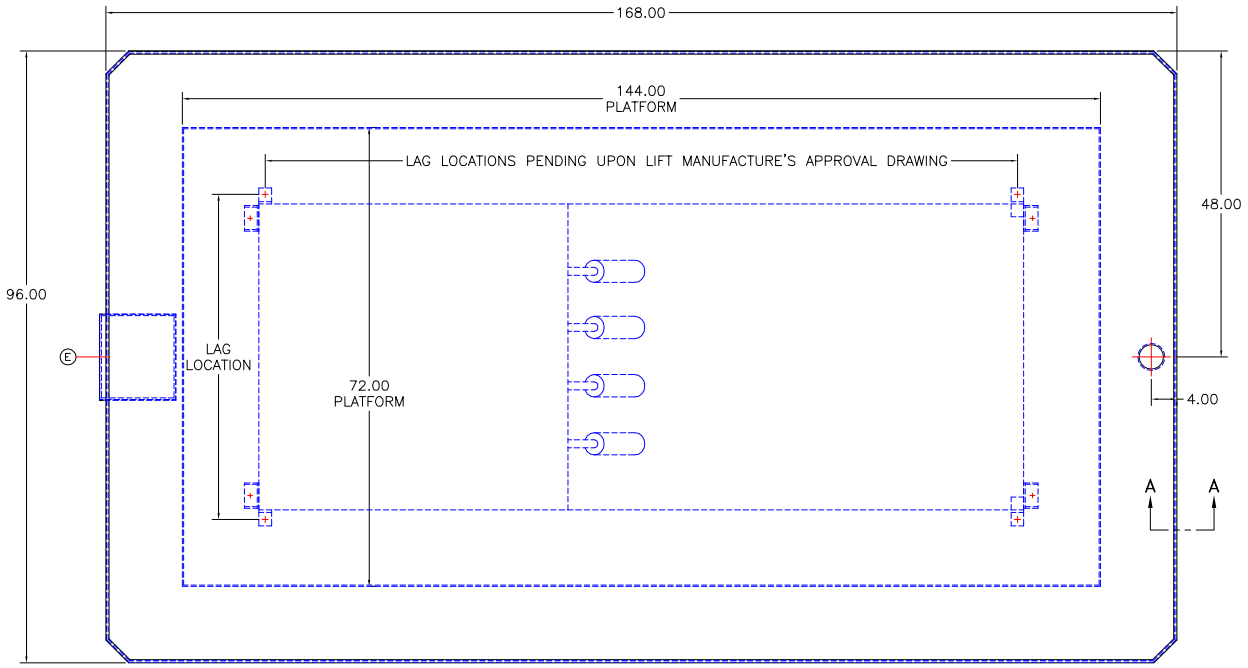

LIFT SPECIFICATIONS

MODEL:----------LST8-36W
WEIGHT CAPACITY------6000 LBS uniform load
PLATFORM----------72.0" Wide x 144.0" Long of 1/4" plate
BASE FRAME----------48.0" Wide x 120.0" Long w/ lag angles
LOWERED HEIGHT-------11.75" w/ down stops
VERTICAL TRAVEL------36.0" @ 84 seconds
ELEVATED HEIGHT------47-3/4"
MOTOR POWER----------115 V, 1 PH, 60 Hz., 1 Hp TENV.
HYDRAULIC FEATURE----min down drifting valve
CONTROLS:----------24 V, 1 PH, 50 Hz
UP/DOWN hand held pushbutton control in
NEMA 4 enclosure on 2 ft. coil cord.
TABLE SURFACE--------11 GA. T304 Stainless Steel w/ #4 Finish
BELLOWS GUARD--------PVC Guard
DRAIN CONNECTION-----3.0" NPT



SECTION A–A
SCALE: 6"=1'-0"

APPROVED
PRINT NAME:
DATE:
SIGNATURE:

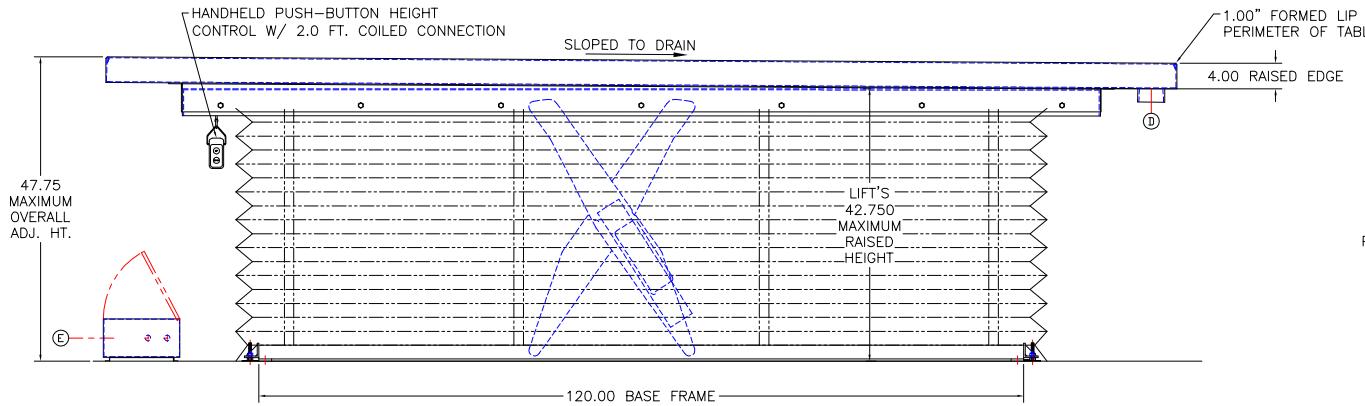

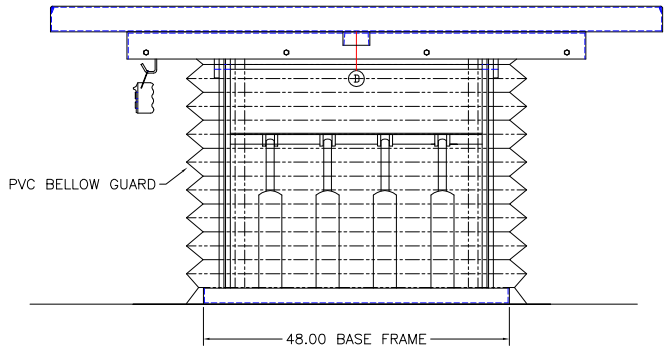



LET.	REVISION	BY	DATE

TBJ INC
1671 ORCHARD DRIVE
CHAMBERSBURG, PA 17201

SCALE 1-1/2"=1'-0"
REF DWG - R09150
DRAWN BY ALE
DATE 3-31-11

6000# LIFT-TYPE TABLE

ROUGH-IN R11055